

20E020" 2060T00T

FIG. 2




Tem α

500 μm (50X)

202020 20607007

FIG. 3

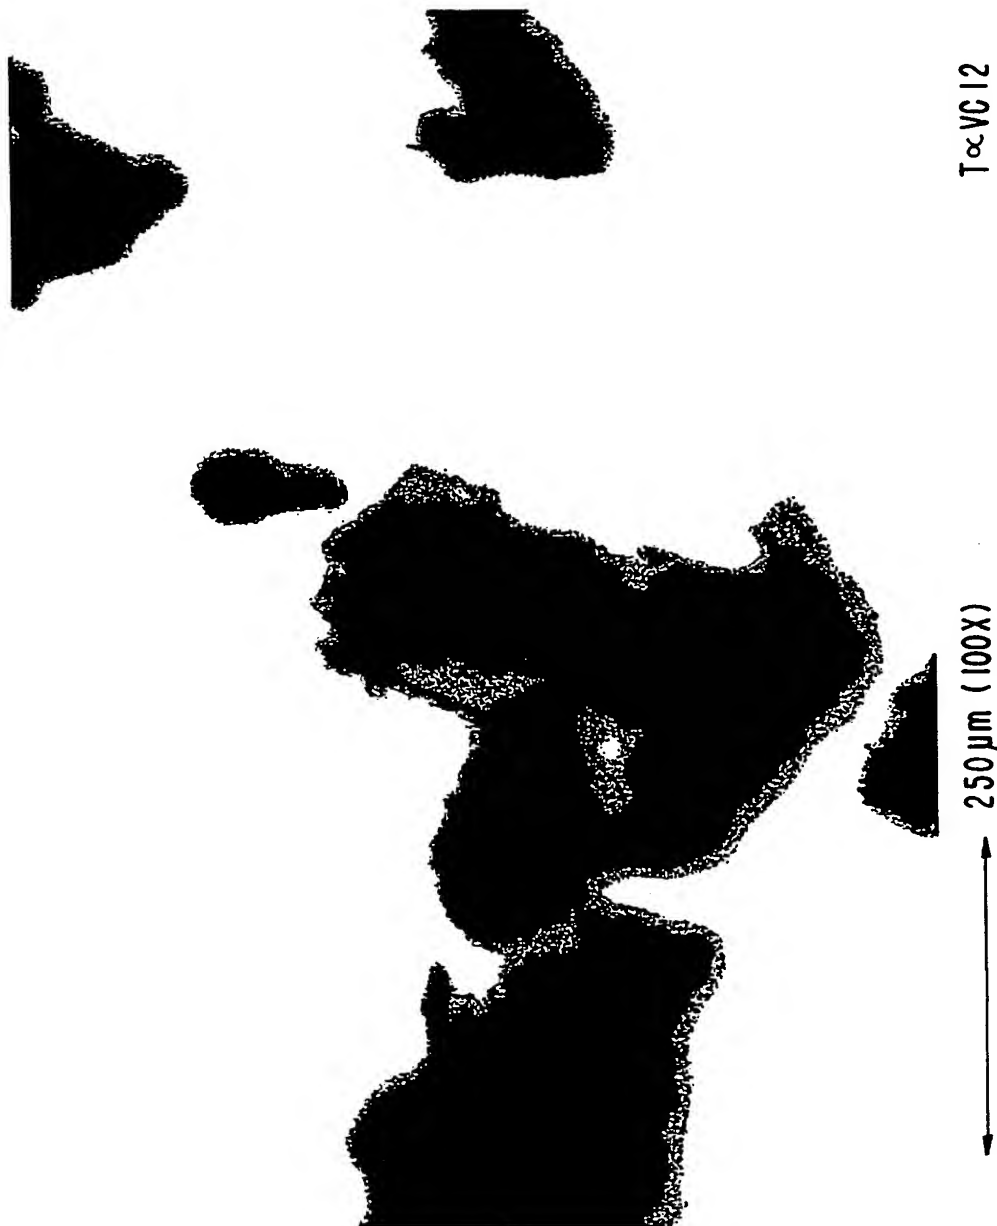

205040" 2060400T


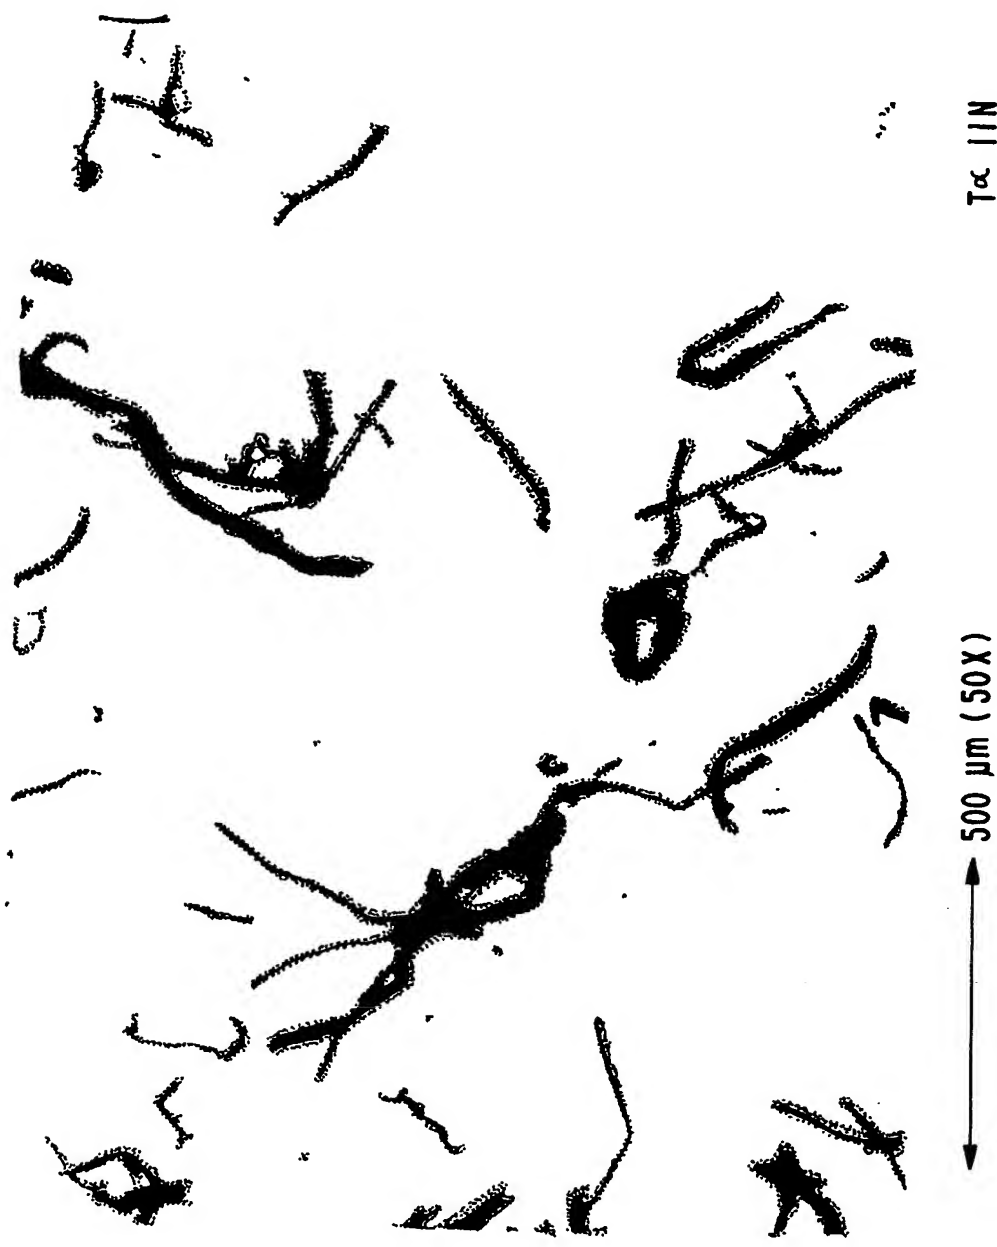


FIG.4

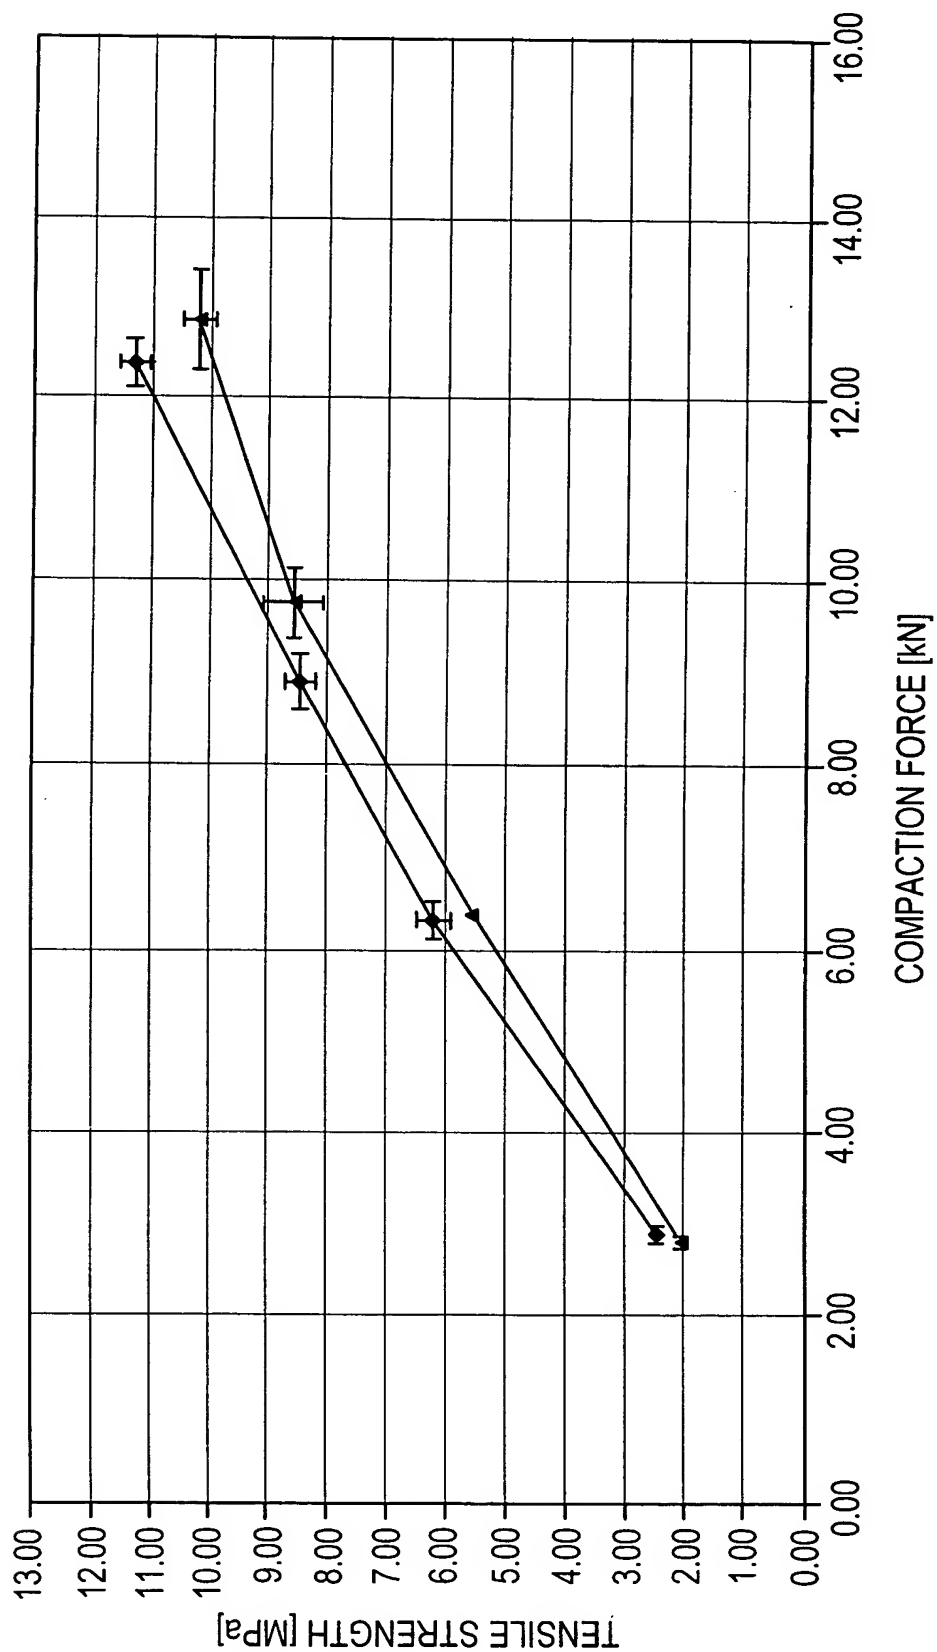

BULK DENSITY-
K1071-0.282 g/cc

—◆— E5B7D25 std. —▲— K1071

FIG. 5

	200 MESH	1	2	AVERAGE	USP LIMITS
PARTICLE SIZE (%)	PA 2923	PASS	PASS	PASS	10-30%
SCOTT DENSITY (g/mL)	DN 695	0.278	0.280	0.279	0.25-0.37%
BULK DENSITY (g/mL)	DN 695	0.294	0.294	0.294	
TAPPED DENSITY (g/mL)	DN 695	0.446	0.445	0.445	0.37-0.50%
WATER SOLUBLE SUB. (%)	WS 2236	0.0560	0.0500	0.0530	NMT 0.24%
pH	PH 2289	5.99	6.01	6.00	5.0-7.0
CONDUCTIVITY (μ S/cm)	PH 2289	89.1	92.7	90.9	NMT 75
LOSS ON DRYING (%)	LD 1898	5.4111	5.4022	5.4067	NMT 6.0%
DP (ID-C)	DP 469			233.5	NMT 350
ID B	ID 624	PASS	PASS	PASS	PASS
ETHER SOLUBLE SUB. (%)	ES	PASS	PASS	PASS	NMT 0.05%
RESIDUE ON IGNITION (%)	RI			NOT TESTED	NMT 0.05%

FIG. 6